



LUBRICANTS | GREASES | SPECIALITY OIL



VOCAL
FOR
LOCAL

FOSSILEX CHEMTECH PVT. LTD.





CHAMP PRIX 4T+

API SN, JASO MA2

10W-40

SYNTHETIC ENGINE OIL

Application:

CHAMP PRIX 4T 10W-40 API SN has an anti-oxidant chemistry that is able to prevent increase in oil and engine temperature especially in air cool designs; this ensures smooth clutch operation and superb pick up giving the rider an expected performance.

Meets Performance Level API SN, JASO MA2

Recommended for: Suzuki, Mahindra Two Wheeler & Yamaha etc.

Pack size: 210L, 50L, 1L, 900ml



CHAMP PRO 4T+

API SM, JASO MA2

20W-40

SEMI SYNTHETIC ENGINE OIL

Application:

CHAMP PRO 4+ SAE 20W-40 API SM has an anti-oxidant chemistry that is able to prevent increase in oil and engine temperature especially in air cool designs; this ensures smooth clutch operation and superb pick up giving the rider an expected performance & Long drain period.

Recommended for: Discover, Hero Splendor, Passion, Honda Shine, TVS Apache and all other Higher CC bikes available in Indian Market.

Meets Performance Level – API SM, JASO MA2

Pack size: 210L, 50L, 1L, 900ml



CHAMP RIO 4T

API SL, JASO MA2

20W-40

4 STROKE MOTORCYCLE ENGINE OIL

Application:

CHAMP RIO 4T SAE 20W-40 API SL has an anti-oxidant chemistry that is able to prevent increase in oil and engine temperature especially in air cool designs; this ensures smooth clutch operation and superb pick up giving the rider an expected performance & Long drain period.

Meets Performance Level – API SL, JASO MA2

Recommended for:

- All 4 Stroke 2 wheelers manufactured by Hero Moto Corp, Bajaj Auto, TVS, Yamaha, Honda, Enfield etc.
- All other high power bikes available in India.

Pack size: 210L, 50L, 1L, 900ml



CHAMP PRO 4T+

API SM, JASO MA2/MB

10W-30

SEMI SYNTHETIC SCOOTER ENGINE OIL

Applications:

CHAMP PRO 4T 10W-30 API SM Recommended for new generation 4-stroke gasoline engines in high performance motorcycles with exceptional demand for fuel economy

Meets Performance Level – API SM, JASO MA2/MB

Features & Benefits: • High oxidation stability minimizes high temperature deposit formation and controls oil thickening facility extended engine and oil life. • Exceptional anti-wear properties protect vital engine and gear components leading to reduced maintenance costs. • Exceptional low volatility characteristics reduce oil consumption. • MB: Recommended for all new generation Gearless Scooters

Pack size: 210L, 50L, 1L, 900ml, 800ml



BULLET KING 4T

API SM, JASO MA2

15W-50

SEMI SYNTHETIC HIGHER CC MOTORCYCLE ENGINE OIL

Application:

BULLET KING 4T 15W-50 API SM provides premium performance and maximum protection in high performance. It is engineered from advanced technology to better withstand the elevated rpm, high temperatures and shock loading common to extreme applications.

Meets Performance Level: API SM, JASO MA2

Recommended for:

Use In High Performance Motorbike Engines in Royal Enfield, Harley Davidson, Yamaha, Honda & Kawasaki etc.

Pack size: 210L, 50L, 2.5L



CHAMP EXTREM 4T

API SM, JASO MA2

20W-50

SEMI SYNTHETIC MOTORCYCLE ENGINE OIL

Application:

CHAMP EXTREM 4T, API SM has an anti-oxidant chemistry that is able to prevent increase in oil and engine temperature especially in air cool designs; this ensures smooth clutch operation and superb pick up giving the rider an expected performance & Long drain period.

Meets Performance Level: API SM, JASO MA2

Recommended for:

- All 4 Stroke 2 wheelers manufactured by Hero Moto Corp, Bajaj Auto, Pulsar, Bajaj Avenger, TVS, Yamaha, Honda, Enfield etc.
- All other high power bikes available in India.

Pack size: 210L, 50L, 3L, 1L



FRONT FORK OIL

PREMIUM QUALITY FRONT FORK OIL

FRONT FORK OIL is a special product dedicated to hydraulic front fork for motorcycles.

Application:

It is applied to all kind of motorcycle front forks working under severe conditions.

Features:

- Excellent chemical stability
- Excellent seal compatibility
- Optimum damping performance in all motorcycle suspensions
- Low pour point

Pack size: 1L, 350ml, 175ml



PRIX

API TC, JASO TC

2T

PREMIUM 2 STROKE ENGINE OIL

PRIX 2T is a 2-stroke motorcycle oil made using mineral oil base. It's increased performance provides standard engines with Protection, Exhaust emissions and soot deposits are efficiently controlled.

Applications: All types of 2-stroke motorcycles, scooters and mopeds. Its composition is perfectly compatible with lead free fuels. It is pre diluted and therefore needs to be dosed to the manufacturer's recommendations.

Benefits:

- Combustion control
- Reduction in exhaust smoke
- Avoids sparks plug fouling
- Less exhaust smoke at start - up

Pack size: 210L, 1L, 500ml



POWERSYN PREMIUM

API SN/CF

0W-40

FULLY SYNTHETIC ENGINE OIL

POWERSYN PREMIUM 0W-40 API SN/CF is formulated with specially selected base oils for direct injection engines, both aspirated and turbo-charged. It is a multi-grade engine oil specifically engineered to respond to all requirements of latest generations diesel engines (common-rail) and VGT petrol engines of cars

MEETS OEM LEVEL PERFORMANCE: ACEA A3/B4-04, Daimler Chrysler MB 229.3 Volkswagen, VW 502.00 505.00

Recommended For: Maruti Suzuki, Hyundai, Skoda, Toyota, Audi, Volkswagen, BMW, Mercedes etc.

Pack size: 210L, 4L, 3.5L, 3L, 1L



SYNERGY

API SN/CF

10W-40

FULLY SYNTHETIC ENGINE OIL

Product Description: Premium performance mineral synthetic oil for passenger car, designed to meet lubrication requirements.

Features & Benefits:

- The product enhances the engine performance.
- The product meets the most demanding car manufacturer's requirements.
- Extended oil change intervals.
- Excellent thermal and oxidation stability.

OEM PERFORMANCE LEVEL: ACEA A3/B3, A3/B4; MB approval 229.3; VW 502 00/505 00

Pack size: 210L, 3.5L, 3L, 1L



POWERSYN PREMIUM

API SN/CF

5W-40

FULLY SYNTHETIC ENGINE OIL

POWERSYN PREMIUM 5W-40 API SN/CF is formulated with specially selected base oils for direct injection engines, both aspirated and turbo-charged. It is a multi-grade engine oil specifically engineered to respond to all requirements of latest generations diesel engines (common-rail) and VGT petrol engines of cars

MEETS OEM LEVEL PERFORMANCE: ACEA A3/B4-04, Daimler Chrysler MB 229.3 Volkswagen, VW 502.00 505.00

Recommended For: Maruti Suzuki, Hyundai, Skoda, Toyota, Audi, Volkswagen, BMW, Mercedes etc.

Pack size: 210L, 4L, 3.5L, 3L, 1L



POWERSYN PREMIUM

API SN/CF

5W-30

FULLY SYNTHETIC ENGINE OIL

POWERSYN PREMIUM 5W-30 API SN/CF is formulated with specially selected base oils for direct injection engines, both aspirated and turbo-charged. It is a multi-grade engine oil specifically engineered to respond to all requirements of latest generations diesel engines (common-rail) and VGT petrol engines of cars

MEETS OEM LEVEL PERFORMANCE: ACEA A3/B4-04, Daimler Chrysler MB 229.3 Volkswagen VW 502.00 505.00

Recommended For: Maruti Suzuki, Hyundai, Skoda, Toyota, Audi, Volkswagen, BMW, Mercedes etc.

Pack size: 210L, 50L, 3.5L, 3L, 1L



TRITON PCL

API SL / CF

20W-50

PETROL, CNG & LPG ENGINE OIL

TRITON PCL 20W-50, API SL/CF is a high performance gas engine oil. Developed for vehicles running on CNG & LPG fuels. Blended with a special additive chemistry, which provides excellent protection to engines against wear, deposits and provides outstanding engine cleanliness.

Applications:

TRITON PCL 20W-50, API SL/CF is formulated with advanced Green & Clean Chemistry. It is recommended for Cars, Taxis, Vans, Jeeps and Three wheelers (4-Stroke Engines).

Pack size: 210L, 50L, 3.5L, 3L, 1L, 500ml



AUTO PREMIUM

API SF / CD

20W-50

MULTIGRADE ENGINE OIL

AUTO PREMIUM 20W-50, API SF/CD is a high performance gas engine oil. Developed for vehicles running on CNG & LPG fuels. Blended with a special additive chemistry, which provides excellent protection to engines against wear, deposits and provides outstanding engine cleanliness.

Applications:

AUTO PREMIUM 20W-50, API SF/CD is formulated with advanced Green & Clean Chemistry. It is recommended for Cars, Taxis, Vans, Jeeps and Three wheelers (4-Stroke Engines).

Pack size: 210L, 1L, 500ml



AdBlue / DEF

DEF

Application

DEF is a high-purity aqueous urea solution for the application as NOx reducing agent for SCR (Selective Catalytic Reduction) exhaust gas after treatment of vehicles with Diesel engine

Benefits:

- Reduces maintenance cost
- Extends SCR system lifespan
- Ensures SCR system efficiency
- Improves fuel economy

Pack size: 210L, 20L



HYDRAULIC OIL

HYDTRON

AW-32/46/68

PREMIUM ANTI-WEAR HYDRAULIC OIL

Applications:

- Recommended for wide variety of Industrial Hydraulic and Circulation systems
- In high and low pressure Mobile Hydraulic systems
- Mobile construction equipment
- Hydraulic control systems of machine tools and presses
- Hydraulic vane, piston and gear type pumps

Benefits:

- Long service life
- Good oxidation stability
- Excellent anti-wear, anti-rust and anti-corrosion properties
- Excellent antifoam and air release characteristics

Pack size: 210L, 55L, 26L, 5L



GLOBALMAX PLUS

API CI-4+ / SL

15W-40

HEAVY DUTY ENGINE OIL



GLOBALMAX PLUS 15W-40, API CI-4+ is high performance heavy duty engine oil specifically developed for low emission vehicle to extend engine life in the most severe duty on and duty on and off highway application. It meets the latest performance requirements of major vehicle manufacturer.

Benefits: • Long drain interval of 80 000 km* • Complies to Euro IV emission norms. • High level efficiency • Clean piston groove and valve seats • Corrosion free bearings • Excellent turbo charger life

MEETS OEM LEVEL PERFORMANCE: Volvo VDS-3, Cummins CES 20078, Daimler MB 228.3, MAN M 3275

Pack size: 210L, 50L, 17L, 15L, 10L, 7.5L, 5L, 1L

TURBO MAX

API CF-4 / SJ

15W-40

PREMIUM DIESEL ENGINE OIL



TURBO MAX SAE 15W-40, API CF4 is a high performance multi-grade diesel engine oil. It is manufactured from high quality base oils and advanced additive technology for superior protection by reducing friction between moving parts and corrosion.

Applications: Recommended for use in all diesel engine Trucks – Tata Motors, Ashok Leyland, Eicher/LCVs – Swaraj Mazda, IVECO/Tractors – New Holland, John Deere, Sonalika, Mahindra, TAFE, Escorts, IITL, PTL/Utility Vehicles – Tata Motors, Mahindra etc.

MEETS OEM LEVEL PERFORMANCE: API CF-4, MIL-L-2104E, BIS EDL-3, Cummins CES 20075

Pack size: 210L, 10L, 7.5L, 5L, 4L, 3L, 2.5L, 1L, 500ml

TURBO STAR

API CH-4 / SJ

15W-40

HEAVY DUTY ENGINE OIL



TURBO STAR CH-4 SAE 15W-40 API CH-4 exceeds the requirements of API CH-4 and hence is able to promise extra oil life value to commercial vehicle engines fitted with turbochargers, especially for 16 to 40 tons trucks; superior cleanliness properties ensure extra life for engine components.

Benefits: • Long Drain interval of 40 000 km* • Clean piston groove and valve seats • Corrosion free bearings • Excellent turbo charger life

MEETS OEM Level Performance: Daimler MB 228.3, Cummins CES 20078, Volvo VDS-3, MAN M 3275

Pack size: 210L, 50L, 20L, 15L, 10L, 7.5L, 6L, 5L, 4L, 3L, 2.5L, 1L, 500ml

MULTI STAR

API CF-4 / SJ

20W-40

MULTIGRADE ENGINE OIL



MULTI STAR CF-4 SAE 20W-40 is a high performance multi-grade diesel engine oils specially designed for use in heavy duty, high-revolution diesel engines for on-highway and off-highway applications.

Applications: Recommended for use in severe duty four stroke naturally aspirated diesel engines both on-highway and off-highway.

Benefits: • Excellent dispersancy, minimize soot induced oil thickening and associated engine wear. • Outstanding thermal stability and oxidation resistance to maintain excellent engine cleanliness. • Prevention of low temperature sludge formation.

Pack size: 210L, 50L, 20L, 10L, 7.5L, 5L, 3L, 1L

COOLANT

HYPERCOOL

COOLS & PROTECTS

COOLANT

CONCENTRATE ENGINE COOLANT



Recommended for: Use in petrol, diesel, LPG & CNG engines used in cars, trucks, tractors and generators

Benefits: • Excellent corrosion protection of entire cooling system containing multi-metal components of aluminium, cast iron, brass and other metals • Prevents scale formation and hence radiator blockage • Dilute with 5 parts of drinking water for best cooling efficiency • Compatible for high pressure turbocharger fitted engines • Recommended to change after 60,000 km of use • Compatible to rubber and plastic components of cooling circuit • Foam and fungus free

Pack size: 210L, 3.5L, 1L, 500ml

UTTO

AGRITRANS

UTHF

UNIVERSAL TRACTOR TRANSMISSION OIL



Applications: Universal Transmission Hydraulic Fluid designed with special additives to keep Tractor's Wet Brake cool & noise free; it works as a Hydraulic fluid for lifting mechanism operation, has excellent gear protection properties and is thus 3 in 1 oil.

Meets OEM Level Performance: Massey Ferguson M-1145, John Deere J-20D, Case New Holland and MAT 3505 & 3525, Volvo VCE 1273.03.

Meets Viscosity Specification Grade: SAE - 10

Pack size: 210L, 50L, 20L, 10L, 5L

TRANSMISSION & GEAR OIL

MASTER DRIVE

API GL-4

EP-90/140

TRANSMISSION OIL

Applications: Lubrication of axles and mechanical transmission systems of cars, buses, trucks and tractors which require moderate duty monograde GL-4 type of gear oils.

Features & Benefits: • Anti-foaming with enhanced ability to form lubricating film. • High oxidation stability. • Compatible with other gear oils. • Reduce unwanted sounds.

EP 90 Pack size: 210L, 50L, 26L, 20L, 10L, 5L, 1L, 500ml

EP 140 Pack size: 210L, 50L, 5L, 1L, 500ml



MASTER DRIVE

API GL-4

EP 80W-90

TRANSMISSION OIL

Recommended for: Transmission gear boxes of: • TATA 1613, LPT 1613, LPT 2518, LPK 2518, Prima 2528 K • Ashok Leyland 2518, 2523, 3518, 4923 • Eicher PO 1059, 3015 • Volvo FH 16

Benefits: • Thermal stability • Oxidation stability • No foam • No pitting • Compatible to a variety of plastics and polymers used in transmission cases • Spur and helical gears

Pack size: 210L, 50L, 20L, 5L, 1L



MASTER SYNC

API GL-5

EP 75W-90

PREMIUM EP, SYNTHETIC AUTOMOTIVE GEARBOX OIL

MASTER SYNC 75W-90, API GL-5 is semi synthetic manual transmission fluid, specially designed for synchromesh gearboxes requiring API GL-5 Performance. It is blended with high quality base stock, carefully selected extreme pressure additive and highly stable viscosity index improver to provide unmatched gear protection.

Applications: MASTER SYNC 75W-90, API GL-5 is a premium quality manual transmission fluid recommended specially for use in Synchromesh Gear Box of Maruti, Hyundai, Tata, VW, Skoda, Ford, GM, Honda and Toyota.

Pack size: 210L, 2.5L



MASTER DRIVE

API GL-5

EP 85W-140

DEFERENTIAL OIL

Recommended for:

Transmission gear boxes of: • TATA 1613, LPT 1613, LPT 2518, LPK 2518, Prima 2528 K • Ashok Leyland 2518, 2523, 3518, 4923 • Eicher Pro 1059, 3015 • Volvo FH 16

Benefits:

- Thermal stability • Oxidation stability
- Compatible to a variety of plastics and polymers used in transmission cases
- Spur and helical gears • No foam • No pitting

Pack size: 210L, 5L, 1L



HYPERSHIFT

GM TASA

ATF

AUTOMATIC TRANSMISSION FLUID

Application:

- Recommended for Automatic transmission and power steering systems of automobiles and earth moving machinery.
- Provides excellent frictional performance.
- Superior anti wear protection.
- Excellent oxidation resistance.
- Seal compatibility.

Pack size: 210L, 5L, 1L, 500ml



ANSICO

XP-220/320/460

PREMIUM GRADE EXTREME PRESSURE GEAR OIL

Application:

ANSICO OIL EP 220/320/460 is a sulphur-phosphorus based industrial gear oil; formulated from extra refined base oils, has exceptional oxidation resistance and is able to meet important industry performance specifications. It is recommended for use in cement mill kiln gear boxes, ball mill gear boxes, steel roll mill gear drives and in non-gear applications like plain bearings and shaft couplings.

Meets requirements of:

- AGMA 9005 - E02 (EP) • US Steel 224

Pack size: 210L, 55L, 26L



GREASE

CHASSIS GREASE

GENERAL PURPOSE CHASSIS GREASE

Applications:

Chassis Grease is used for general-purpose chassis lubrication, including suspension and steering system. It is used in open and semi enclosed gears as well as chain drives for farm equipments. It is not recommended for high temperatures application due to its low drop point.

Benefits: • Excellent resistances to water wash out. • Ensures protection against wear by preventing metal-to-metal contact. • Provide equally good dispensing qualities in summer and winter. • Provides protective coating to exposed parts of equipments, during temporary storage.

Pack size: 180kg, 18kg



MULTIMAX R3 GREASE

NLGI - 3, PREMIUM QUALITY LONG LIFE

NLGI 3 Grease of Lithium, is able to deliver service life of 75,000 km* in long haul trucks.

Recommended for:

- Anti friction ball and roller bearings of all automotive wheel applications in trucks, tractors, cars, 3W, 2W

Benefits:

- Corrosion & water resistant
- Maintains oil film on friction areas at all operating temperatures

Pack size: 180kg, 18kg, 5kg, 3kg, 1kg, 500g, 200g



EP-2 GREASE

NLGI - 2, EXTREME PRESSURE GREASE

EP-2 Grease is an extreme pressure Lithium soap grease that contains oxidation, rust and corrosion inhibitors and provides excellent EP properties.

APPLICATIONS: EP-2 Grease is recommended for lubrication of plain and rolling element bearings in normal through heavy-duty industrial applications. It is suitable where loads are high or shock loads are present. It resists water washing and provides rust protection for bearings if water is present. The softer grades are particularly suitable for use in centralized lubrication system and can be used for both automotive and industrial applications.

Pack size: 180kg, 18kg



MULTIMAX AP3 GREASE

NLGI - 3, PREMIUM QUALITY MULTI-PURPOSE GREASE

NLGI - 3 Grease of Lithium, is able to deliver service life of 40 000 km in long haul trucks.

Recommended for:

- Anti friction ball and roller bearings of all automotive wheel applications in trucks, tractors, cars, 3W, 2W

Benefits: • Corrosion & water resistant • Maintains oil film on friction areas at all operating temperatures

Pack size: 180kg, 18kg, 5kg, 3kg, 1kg, 500g



CALCIUM MP3 GREASE / GEL GREASE 3

AUTOMOTIVE & INDUSTRIAL GREASES

Product Description: GOLD MP-3 Grease is a Calcium based water resistant multipurpose tacky Gel Grease.

Application: Recommended for general application for plain and anti-friction bearing where temperatures are moderate below 70°C. This grease is also recommended for chassis lubrication including suspension and steering system and for certain open and semi enclosed gears as well as chain drives of farm equipments.

Pack size: 180kg, 18kg



WHEEL BEARING GREASE

AUTOMOTIVE & INDUSTRIAL GREASES

Applications: • Wheel Bearings, Industrial bearings and other Automotive/Industrial applications which do not come in contact with water.

Features & Benefits • High temperature stability. • High drop Point • Excellent consistency & Stability • High torque and high speed shock loading • Ensures maximum Lubrication and longer bearing life. • Reduces repairs and replacement test resulting in maintenance and running expenses. • Excellent shear stability and good surface adhesion. • It is highly resistant to heat, rust and corrosion.

Pack size: 180kg, 18kg, 5kg, 1kg, 500g





About us...

Fossilex Chemtech Pvt. Ltd. is a leading organization involved in marketing "Fossilex" Brand for in Automotive & Industrial Lubricants in OEMs & Retail Market.

Fossilex Chemtech Pvt. Ltd. has been competent to rise and make a mark for itself because of our belief in the cardinal and key rationale of customer satisfaction and tending to the minutest of attributes.

Fossilex Chemtech Pvt. Ltd. is driven by the demand from the Indian & export consumers.

We supply all types of lube oils (viz. Engine oils, Gear oils, Transmission oils, Industrial oils etc.), Super clean oils & specialty products (Coolants, Brake fluids & DEF Fluids), Viscosity Modifiers etc. catering about 500 SKU's for different consumers.

Long time existence in the lubricants industry, gives us the confidence to support marketing partners in developing a sustainable supply, marketable success and brand assurance

Our Vision

The vision of Fossilex Chemtech Pvt. Ltd. is to initiate and fulfill primary and secondary consumers in the automotive lubricants replacement market with high-quality products coupled with diligent customer service and timely delivery at competitive prices in the market. We take it to be our privilege to be able to reach out to the consumers with the best quality Lube Oils at a low price yet without cutting corners.

Our Mission

- We aim to provide consumers with the very best quality Lubes for new Generation vehicles.
- Fossilex Chemtech Pvt. Ltd. is committed to protecting the environment and will introduce specific products to assist in a direct and an indirect manner towards fuel efficiency of components and vehicles.
- Serving top quality products and timely delivery gives us the confidence to support marketing partners in developing a sustainable supply.
- continuous innovation and meticulous work, allows us to retain customers in the long run.

Fossilex Chemtech Pvt. Ltd. Product Portfolio :-

Automotive Lubricants

- Petrol Engine Oils
- Diesel Engine Oils
- 2 & 3 Wheeler Oils
- Tractor Engine Oils & UTTO
- Gas / CNG Engine Oils
- Gear Oils
- Automotive Greases

Industrial Lubricants


- Hydraulic Oils
- Cutting Oils (Neat & Soluble)
- Heat Transfer Oils
- Industrial Gear Oils
- Quenching Oils
- Rust Preventive Oils
- Transmission Oils (CAT Specs)

Fluids

- Coolant
- DEF / AdBlue

Specialty Lubricants

- Fully/Semi Synthetic Engine Oil

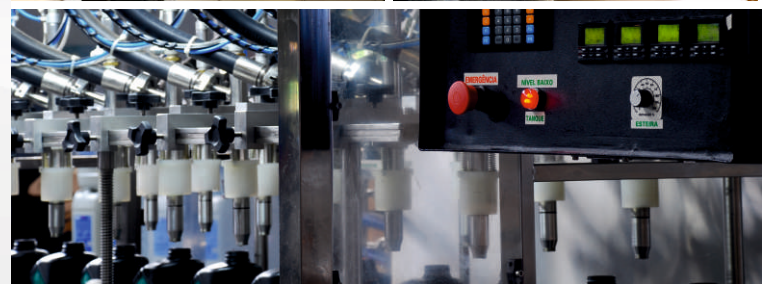

Fossilex Chemtech Pvt. Ltd.

Regd. Office.: AT C-40/0:3, Sector 24, Sanpada, Navi Mumbai - 400 705, Maharashtra Telephone No. +91-91 366 06 605
E-mail: Customercare@fossilex.com • www.fossilex.com

Authorised Distributor / Dealer Name & Address